


LMD Series Mechanical Dock Leveler



LMD Series Mechanical Dock Leveler



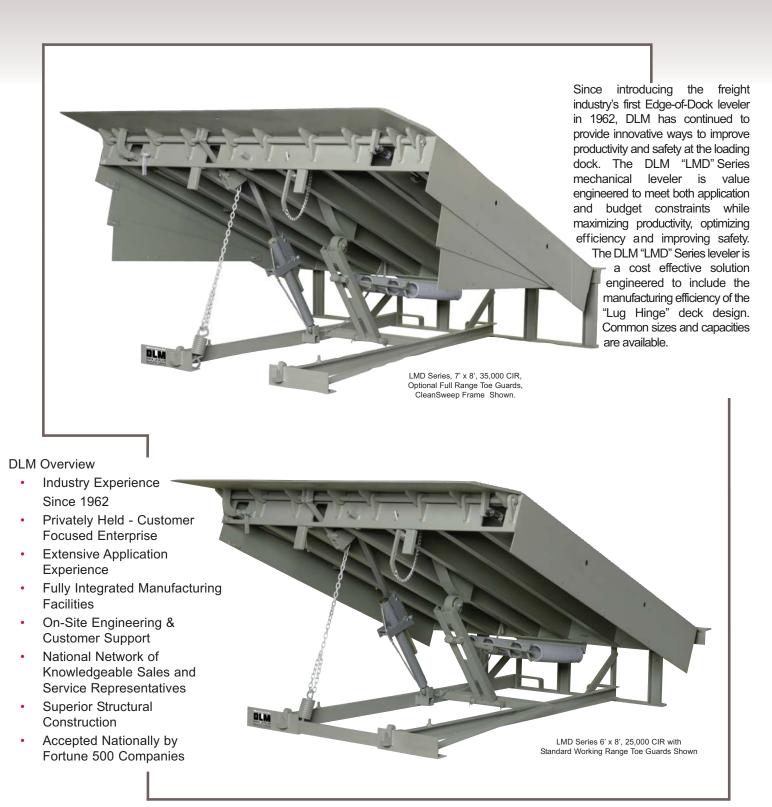



DLM's continuing commitment, is to design and build the very best dock levelers our industry has to offer. A strong customer focus has facilitated the inclusion of important user features into every "LMD" Series leveler - important features like:

Structurally Superior

- Four sided box construction provides unmatched structural integrity.
- Leveler lip and deck are constructed with high-strength 55,000 lb yield, safety treadplate.
- Deck support members are constructed of roll form "C" channel for 25,000 lbs. and 35,000 lbs. comparable industry rated capacity (CIR) and structural "C" channel for 40,000 lbs CIR capacity.
- Optional support for 3-wheeled fork trucks is available.

CamControl™ Counter Balance Assembly

- · Multiple spring counter balance.
- Precision lifting roller and metered cam provide superb balance and easy walk down of the ramp.

Easy Release

- Finger tip release operation via unique lever design.
- Extended range float barrel with automatic release provides unlimited float capability - an important consideration for handling air-ride suspension trailers.

CleanSweep™ Frame

- Provides clear access to area beneath platform.
- · Allows easy removal of debris.
- Ideal for food distribution applications where maintaining sanitary standards is important.



Deck & Lip Maintenance Struts

- Permanently mounted, hinged maintenance strut supports deck during maintenance or inspection.
- Hinged maintenance strut is "Lockout/ Tagout" capable.



Lip Drive™ Positive Lip Extension

- · Lip drive provides reliable lip extension.
- Gas filled shock meters the descent of the lip and is reliable in all climate conditions.
- Lip mechanism is completely yieldable.



LMD Series Standard Features Include ...

- Box Construction Deck Assembly
- Multi-position Structural Steel Safety Legs
- Extended Range Float/Hold-down Mechanism
- Yieldable Lip Plate
- CamControl Counter Balance Assembly
- 6'0", 6'6", and 7'0" Widths
- 6'0" and 8'0" (Nominal) Lenghts

- Comparable Industry Rating (CIR) Capacities 25,000 lbs, 35,000 lbs, and 40,000 lbs
- Lip Drive Positive Lip Extension
- "Lockout/Tagout"
 Maintenance Strut
- Night Locks/Cross Traffic Support
- Working Range Toe Guards
- Two (2) DB-13 Molded Rubber Bumpers

Designed, Engineered & Manufactured in the U.S.A.

Distributed By:

Fray Pedro de Gante 85, Cimatario, Santiago de Querétaro, Querétaro, México CP 76030

(442) 727-0441

contacto@klh.com.mx

